



American Trailer Exchange
Atlanta, GA
678-750-7000
www.amtrex.net

A Dorsey's More Durable



Craftsmen in the Dorsey factory, Elba, Ala. 1911.



In 1911,

the folks in Elba, Alabama set out to build the most durable custom trailers on the market.

Today, Dorsey's vision remains the same.



MODEL: FC - 48

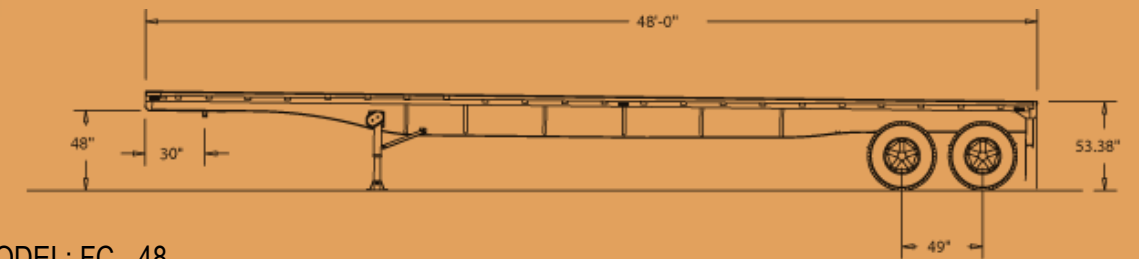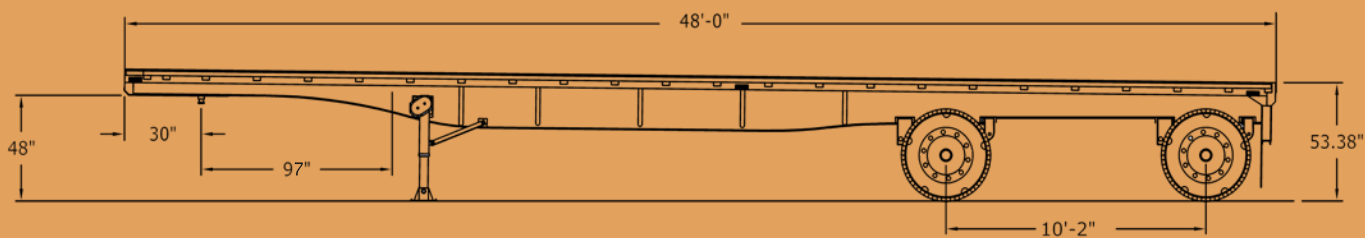

MODEL: FC - 48

COMBO GIANT™

BODY STRUCTURE

- ▶ **Capacity:** 80,000 lbs GVWR (60,000 in 10')
- ▶ **Weight:** 10,300 lbs +/- 3%
- ▶ **Length:** 48' or 53'
- ▶ **Width:** 102" overall
- ▶ **Coupler Height:** 48"
- ▶ **King Pin:** Setting 30"
- ▶ **Plate:** 1/4"
- ▶ **Main Beams:** Fabricated high tensile steel
- ▶ **Flanges:** Grade 130 high tensile steel, 3/8" x 5" upper and lower
- ▶ **Web:** Grade 80 high tensile steel, one piece
- ▶ **Front Skirt:** Formed steel with tapered corners
- ▶ **Rear Skirt:** Extruded aluminum with integral stake pockets
- ▶ **Bumper:** US DOT and transport canada compliant rear impact bumper
- ▶ **Cross Members:** 4" steel I-beam on 12" centers
- ▶ **Cross Member Knee Brace:** Fabricated one piece steel on 60" centers
- ▶ **Side Rail:** Extruded aluminum with integrated "LL" and J-hook track
- ▶ **Rub Rail:** 3/8" x 3" Aluminum (recessed for DOT tape)
- ▶ **Stake Pockets:** Aluminum, external mount, 24" on center with double pipe spools
- ▶ **Floor:** Extruded aluminum with 4 nailers
- ▶ **Load Securement:** Extruded double "L" (road side) with 12 winches and J-hook track (both sides)
- ▶ **Mud Flaps:** Heavy duty, white, anti-spray, anti-sail
- ▶ **Paint:** Fully blasted, two part primer, two part black urethane
- ▶ **Lighting:** Grote LED sealed lights, Grote sealed wiring harness
- ▶ **Other:** Conspicuity treatment complies with all regulatory requirements

COMPONENTS

- ▶ **Kin Pin:** 2" Holland - AAR
- ▶ **Landing Gear:** Jost-heavy duty 2-speed gear drive, 140,000 lb static load capacity
- ▶ **Suspension:** Heavy duty air ride, 23,000 lb. capacity
- ▶ **Axles:** Heavy duty, 22,500 lb. capacity
- ▶ **ABS Brakes:** Bendix, 2S1M
- ▶ **Brakes:** 16 1/2" x 7" quick change
- ▶ **Hubs:** Standard cast, hub-piloted, 10-stud unimount, oil lubricated
- ▶ **Brake Drums:** Standard cast, outboard mount
- ▶ **Wheels:** Hub piloted steel
- ▶ **Tires:** Double coin radials

OPTIONS

- ▶ Custom lengths - upper and lower decks
- ▶ Custom widths
- ▶ Multiple axle configurations
- ▶ Heavy duty beam packages
- ▶ Lift axles
- ▶ Toolbox(es): Steel or Aluminum
- ▶ Heavy duty coil package
- ▶ D rings
- ▶ Strobe lights
- ▶ Wide load lights
- ▶ Custom light package
- ▶ Hub-odometer
- ▶ Tire inflation system
- ▶ Bulkhead: Steel or Aluminum
- ▶ Aluminum floor sills



www.amtrex.net

For more options
visit our website

American Trailer Exchange * Atlanta, GA * 678-750-7000
For more information, visit www.amtrex.net

Note: All specifications are subject to change without prior notification. All dimensions and weights are approximate. Trailers pictured in this brochure may feature optional equipment.